BOTRIAN

Gubersail Tire (Jiangsu) Co., Ltd.
No. 1, Gubersail Avenue, Huai'an District,
Huai'an City, Jiangsu Province

www.gubersail.com
info@gubersail.com



BOTRIAN

PASSENGER CAR TYRE CATALOGUE

2026



ABOUT BOTRIAN

Confidence On Every Journey

BOTRIAN was born in the GUBERSAIL's Industry 4.0 Smart Tyre Factory, a modern intelligent manufacturing base driven by user needs, centered on R&D, and powered by innovation.

Guided by the manufacturing philosophy of "Intelligence, Green, Efficiency, and Lean, "GUBERSAIL operates across 85.6 ha of land and 650,000 square meters of facilities, where an intelligent production system and rigorous quality control ensure the stability and reliability of every tyre produced.

On this foundation of manufacturing excellence, BOTRIAN emerged. It embodies GUBERSAIL's unwavering commitment to product quality and reflects our deep understanding of driving safety and riding comfort.

With the core philosophy of "Stability, Reliability, and Reassurance," BOTRIAN is dedicated to providing trustworthy tyre choices for drivers who value safety and comfort.

The name "BOTRIAN" symbolizes steady progress – moving forward with confidence through every journey and every change in road condition.

It represents not only performance, but also a pragmatic and steadfast spirit: advancing with stability, achieving progress through composure, and restoring the essence of trust and peace of mind in every drive.

Empowered by GUBERSAIL's intelligent manufacturing strength and BOTRIAN's craftsmanship, we deliver genuine quality that provides long-lasting support and reliable protection for every vehicle.

Whether for urban commuting or long-distance travel, BOTRIAN tyres consistently ensure stable performance and dependable quality, making every journey smoother and more secure.

Gubersail Smart Factory

Industrial 4.0 Automated Factory

Smart Manufacturing · Strict Quality Control · Driving Brand Growth

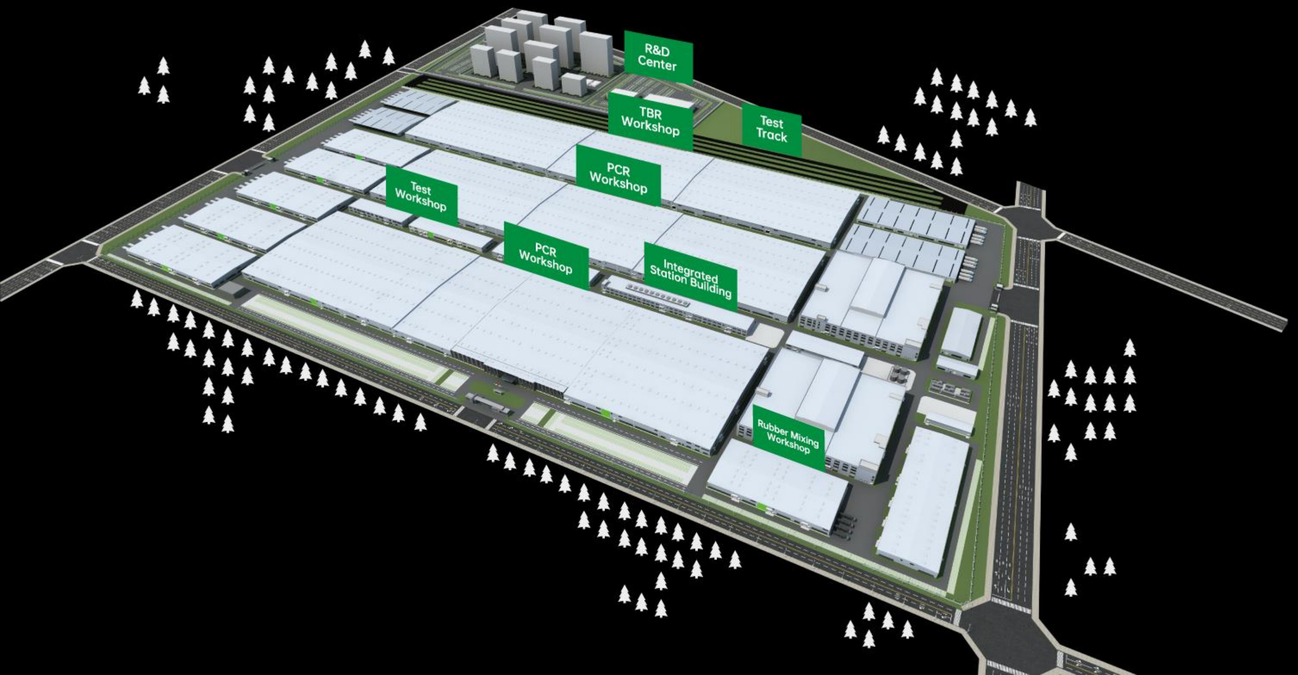

85.6 Ha
Covered Area

650,000 m²
Building Area

All about Progress

Gubersail is a tyre manufacturer that is user-demand oriented, R&D-focused and innovation-driven.
Upholding the spirit of wisdom, eco-friendliness, efficiency and lean management, we pursue excellence in every detail, committed to delivering exceptional quality.
We combine craftsmanship with service excellence to create extraordinary products, initiating a journey of freedom, exploring the infinite possibilities of the world together with every user.

ALL ABOUT PROGRESS

Product Line-up

HP 07-20



Acceleroad BC15 Acceleroad BC25 Acceleroad BC16 Acceleroad BC26

UHP 21-24



Vorttexa BU78

EV 25-28



Quietoro BEV68

HT 29-32



Transvelo BT6

VAN 33-36



Enduaix BV28

AT 37-40



Landpioneer AT B61

ALL SEASON 41-44



Climatis BAC39

WINTER 45-52



Cryospine BW83 Cryospine BW86

STUD 53-56



Cryospine BW89



Acceleroad BC15

HP Tyre for Everyday Comfort and Longevity

Optimized tread structure and wear-resistant compound deliver both comfort and extended mileage. Stable support and long-lasting performance across diverse road conditions ensure a relaxed and reassuring driving experience every day.

Eco-efficient | Quiet & Comfort | Safety & Stability

Rim Size	12"-15"inch
Tread Width	145-175 mm
Aspect Ratio	60-70
Speed Rating	T-H

HP



Fast Drainage

Three longitudinal grooves with a large-angle design effectively enhance water drainage performance.



Stable Driving

Balanced tread block strength and low-density fine grooves ensure better wear resistance and stability of the tyre.



Fuel-saving Compound

A special rubber compound is used, and the angle of the tread's lateral grooves is optimized, effectively reducing energy loss during tyre rolling and making vehicle driving more effortless.

Comfort & Low Noise

The tyre tread design is inspired by "seagull wings," and the narrower lateral grooves provide a quieter and more comfortable experience for drivers and passengers.

By optimizing the tread design, the noise generated by the tyre during driving is effectively reduced, creating a quiet and comfortable riding environment inside the vehicle while enhancing driving comfort.





Acceleroad BC15

Inch	Size	Ply Rating	Speed Rating	Load Index	Load Capacity (kg)	Max Pressure	Standard Rim	Section Width	Overall Diameter
12	NEW 145/80R12		T	74	375	290	4.00B	145	537
13	155/65R13		T	73	365	300	4½J	157	532
	155/70R13		T	75	387	300	4½J	157	548
	165/65R13		T	77	412	300	5J	170	544
	165/70R13		T	79	437	300	5J	170	562
	175/60R13		H	77	412	300	5J	177	540
	175/70R13		T	82	475	300	5J	177	576
	NEW 175/75R13		T	85	515	300	5.00B	177	592
14	NEW 155/65R14		T	75	387	250	4½J	157	558
	165/60R14		H	75	387	300	5J	170	554
	165/70R14		T	81	462	300	5J	170	588
	175/65R14		H	82	475	300	5J	177	584
	175/65R14		T	82	475	300	5J	177	584
	175/70R14		H	84	500	300	5J	177	602
	NEW 175/75R14		T	86	530	300	5J	177	618
15	NEW 165/60R15	XL	H	81	462	290	5J	170	579
	NEW 175/60R15		H	81	462	250	5J	177	591
	175/65R15		H	84	500	300	5J	177	609



Quiet Efficiency
Steady Control



Acceleroad BC25

HP Tyre for Fuel-efficient and Quiet Driving

Optimized tread structure and pitch design balance comfort and handling, offering a soft road feel and responsive steering for a smooth, effortless drive every time.

Eco-efficient | Quiet & Comfort | Safety & Stability

Rim Size	13"-17"inch
Tread Width	185-225mm
Aspect Ratio	55-70
Speed Rating	T-V

HP



Fast Drainage

Four longitudinal grooves with a large-angle design effectively enhance water drainage performance.



Stable Driving

Balanced tread block strength and low-density fine grooves ensure better wear resistance and stability of the tyre.



Quiet & Comfort

The tyre tread design is inspired by "seagull wings," and the narrower lateral grooves provide a quieter and more comfortable experience for drivers and passengers.
By optimizing the tread design, the noise generated by the tyre during driving is effectively reduced, creating a quiet and comfortable riding environment inside the vehicle while enhancing driving comfort.



Fuel-saving Compound

A special rubber compound is used, and the angle of the tread's lateral grooves is optimized, effectively reducing energy loss during tyre rolling and making vehicle driving more effortless.



Inch	Size	Ply Rating	Speed Rating	Load Index	Load Capacity (kg)	Max Pressure	Standard Rim	Section Width	Overall Diameter
13	185/70R13		T	86	530	300	5½J	189	590
14	185/55R14		H	80	450	250	6J	194	560
	185/60R14		H	82	475	300	5½J	189	578
	185/65R14		H	86	530	300	5½J	189	596
	185/70R14		T	88	560	300	5½J	189	616
	NEW 195/60R14		H	86	530	250	6J	201	590
	NEW 195/65R14		H	89	580	250	6J	201	610
	NEW 195/70R14		H	91	615	300	6J	201	630
	NEW 205/60R14		H	88	560	250	6J	209	602
	205/70R14		H	95	690	300	6J	209	644
	NEW 215/70R14		H	96	710	250	6½J	221	658

Acceleroad BC25

Inch	Size	Ply Rating	Speed Rating	Load Index	Load Capacity (kg)	Max Pressure	Standard Rim	Section Width	Overall Diameter
15	185/55R15		H	82	475	300	6J	194	585
	185/60R15		H	84	500	300	5½J	189	603
	185/65R15		H	88	560	300	5½J	189	621
	195/60R15		H	88	560	300	6J	201	615
	195/65R15		V	91	615	300	6J	201	635
	205/60R15		V	91	615	300	6J	209	627
	205/65R15		H	94	670	300	6J	209	647
	NEW 215/70R15		H	98	750	250	6½J	221	683
16	NEW 185/55R16	XL	H	87	545	340	6J	194	610
	195/60R16		H	89	580	300	6J	201	640
	205/55R16		V	91	615	300	6½J	214	632
	205/60R16		V	92	630	300	6J	209	652
	205/65R16		V	95	690	300	6J	209	672
	215/60R16		V	95	690	300	6½J	221	664
	215/65R16		H	98	750	300	6½J	221	686
	225/60R16		H	98	750	300	6½J	228	676
17	205/60R17	XL	H	97	730	340	6J	209	678



Acceleroad BC16

HP Tyre for Comfort and Quiet Driving

Optimized pitch arrangement and bionic noise-reduction tread design effectively minimize road noise. A high-performance rubber compound ensures a soft road contact and stable grip, delivering a quiet and smooth driving experience across city and highway conditions.

Quiet & Comfort | Precise Handling | For Both City & Highway Use

Rim Size	13"-15"inch
Tread Width	155-175mm
Aspect Ratio	60-70
Speed Rating	T-H

Noise-optimized Pitch Design

Adopting a multi-pitch tread block arrangement, the pattern offsets sound waves to effectively disperse frequency resonance, significantly reducing rolling noise.



Widened Rib Structure

The reinforced central rib enhances overall tread rigidity, improving straight-line stability and steering response.





Optimized Shoulder Profile

The curved shoulder transition design evens out ground pressure distribution, delivering smoother cornering and consistent grip across turns.



All-terrain Adaptability

Performs reliably across city roads, highways, and wet surfaces—balancing drainage, comfort, and stability.



Soft Rubber Compound

Formulated with low-noise polymer materials, the compound achieves a perfect balance between durability and comfort, preserving a smooth, gentle ride even after long-distance driving.



Acceleroad BC16

Inch	Size	Ply Rating	Speed Rating	Load Index	Load Capacity (kg)	Max Pressure	Standard Rim	Section Width	Overall Diameter
13	155/65R13		T	73	365	300	4.5J	157	532
	155/70R13		T	75	387	300	4.5J	157	548
	165/65R13		T	77	412	300	5J	170	544
	165/70R13		T	79	437	300	5J	170	562
	165/70R13-WSW		T	79	437	300	5J	170	562
	175/60R13		H	77	412	300	5J	177	540
	175/70R13		T	82	475	300	5J	177	576
	175/70R13-WSW		T	82	475	300	5J	177	576
	185/70R13		T	86	530	300	5J	198	590
14	165/60R14		H	75	387	300	5J	170	554
	165/70R14		T	81	462	300	5J	170	588
	175/65R14		T	82	475	300	5J	177	584
	175/65R14		H	82	475	300	5J	177	584
	175/70R14		H	84	500	300	5J	177	602
15	175/65R15		H	84	500	300	5J	177	609

Acceleroad BC26

HP Touring Tyre for Stability and Durability

Stable and Enduring Comfort in Every Drive



Focused on fuel efficiency, noise reduction, and safety performance, the tyre combines an optimized rubber compound with a four-groove drainage design to balance energy consumption and stability. It adapts seamlessly to diverse driving scenarios, embodying the concept of green mobility.

Quiet Tread Design | Long-lasting Durability | Stable Handling

Rim Size	13"-16" inch
Tread Width	185-225mm
Aspect Ratio	55-70
Speed Rating	T-V



Quiet Tread Design

The multi-pitch tread block design, combined with noise-reduction technology, effectively minimizes rolling noise to deliver an exceptionally comfortable driving experience.



Enhanced Central Rib

The reinforced central rib and continuous groove structure improve straight-line stability and resistance to lateral sway, ensuring safer performance at high speeds.



Efficient Drainage System

Four wide longitudinal grooves paired with optimized lateral channels accelerate water evacuation and reduce hydroplaning, maintaining firm control even on wet roads.



Optimized Contact Design

A balanced tread pressure distribution minimizes uneven wear, effectively extending tyre life while maintaining consistent performance throughout use.



Inch	Size	Ply Rating	Speed Rating	Load Index	Load Capacity (kg)	Max Pressure	Standard Rim	Section Width	Overall Diameter
13	185/70R13		T	86	530	300	5½J	189	590
14	185/60R14		H	82	475	300	5½J	189	578
	185/65R14		H	86	530	300	5½J	189	596
	185/65R14-WSW		H	86	530	300	5½J	189	596
	185/70R14		T	88	560	300	5½J	189	616
	185/70R14-WSW		T	88	560	300	5½J	189	616
	205/70R14		H	95	690	300	6J	209	644
15	185/55R15		H	82	475	300	6J	194	585
	185/60R15		H	84	500	300	5½J	189	603
	185/65R15		H	88	560	300	5½J	189	621
	185/65R15-WSW		H	88	560	300	5½J	189	621

Acceleroad BC26

Inch	Size	Ply Rating	Speed Rating	Load Index	Load Capacity (kg)	Max Pressure	Standard Rim	Section Width	Overall Diameter
15	195/60R15		H	88	560	300	6J	201	615
	195/65R15		V	91	615	300	6J	201	635
	195/65R15-WSW		V	91	615	300	6J	201	635
	195/65R15-RWL		V	91	615	300	6J	201	635
	205/60R15		V	91	615	300	6J	209	627
	205/65R15		H	94	670	300	6J	209	647
	205/65R15-WSW		H	94	670	300	6J	209	647
16	195/60R16		H	89	580	300	6J	201	640
	205/55R16		V	91	615	300	6½J	214	632
	205/60R16		V	92	630	300	6J	209	652
	205/65R16		V	95	690	300	6J	209	672
	215/60R16		V	95	690	300	6½J	221	664
	215/65R16		H	98	750	300	6½J	221	686
	225/60R16		H	98	750	300	6½J	228	676

Vorttexa BU78

UHP Tyre for Dynamic Driving Control

Designed for high-performance driving, it combines an inner-outer groove drainage system with a high-grip rubber compound to ensure responsive handling and stable performance on both dry and wet roads, delivering precise steering in every turn.

Precise Handling | Strong Grip | Fast Evacuation

Rim Size	15"-22" inch
Tread Width	195-285mm
Aspect Ratio	35-55
Speed Rating	V-Y

1 Optimized Tread Groove Design

The design of the tread's lateral grooves mimics the aerodynamic profile of a meteor's tail streaking across the night sky—smooth and highly dynamic. Even in a stationary state, it evokes a sense of readiness for speed, as if poised to surge forward at any moment.

2 Meteor-inspired Sidewall Accents

The sidewall features a gradient line design echoing meteors. As the tyre rolls, it resembles a meteor streaking across the road, endowing the vehicle with a dynamic beauty of lightning-fast speed.

3 Excellent Handling Performance

The inner through grooves, combined with the steel-belted inner shoulder pitch segments, form an efficient drainage system. This system can quickly cut through the water film, significantly reduce tyre slippage, and enhance wetland performance.
The outer non-through grooves optimize the tread force distribution, enhance cornering control, and significantly improve the tyre's handling stability.

4 Excellent Dry/Wet Performance

The adoption of four thick and wide straight longitudinal main grooves constructs an efficient drainage channel. This reduces the occurrence of hydroplaning, thereby enhancing wet braking performance and ensuring driving safety on slippery roads.
Larger tread blocks and an optimized pitch arrangement help enhance the tyre's rigidity and stability, enabling better precise handling when driving on dry surfaces.

5 High-grip Compound

The new rubber compound, manufactured using advanced technology, enhances the friction between the tyre and the ground, providing excellent grip. Whether during high-speed acceleration or emergency braking, it enables the vehicle to respond promptly.



Precise Control, Steady Performance

Vorttexa BU78

Inch	Size	Ply Rating	Speed Rating	Load Index	Load Capacity (kg)	Max Pressure	Standard Rim	Section Width	Overall Diameter
15	195/50R15		V	82	475	300	6J	201	577
	195/55R15		V	85	515	300	6J	201	595
16	195/45R16	XL	V	84	500	340	6½J	195	582
	195/50R16	XL	V	88	560	340	6J	201	602
	195/55R16	XL	V	91	615	340	6J	201	620
	205/45ZR16	XL	W	87	545	340	7J	206	590
	205/50ZR16	XL	W	91	615	340	6½J	214	612
	205/55ZR16	XL	W	94	670	340	6½J	214	632
	NEW 215/45ZR16	XL	W	90	600	290	7J	213	600
	215/55ZR16	XL	W	97	730	340	7J	226	642
	225/55ZR16	XL	W	99	775	340	7J	233	654
17	205/40ZR17	XL	W	84	500	340	7½J	212	596
	205/45ZR17	XL	W	88	560	340	7J	206	616
	205/50ZR17	XL	W	93	650	340	6½J	214	638
	215/45ZR17	XL	W	91	615	340	7J	213	626
	215/50ZR17	XL	W	95	690	340	7J	226	648
	215/55ZR17	XL	W	98	750	340	7J	226	668
	225/45ZR17	XL	W	94	670	340	7½J	225	634
	225/50ZR17	XL	W	98	750	340	7J	233	658
	225/55ZR17	XL	W	101	825	340	7J	233	680
	235/45ZR17	XL	W	97	730	340	8J	236	644
	235/50ZR17	XL	W	100	800	340	7½J	245	668
	235/55ZR17	XL	W	103	875	340	7½J	245	690
	245/45ZR17	XL	W	99	775	340	8J	243	652
18	215/45ZR18	XL	W	93	650	340	7J	213	651
	225/40ZR18	XL	Y	92	630	340	8J	230	637
	225/40ZR18	XL	W	92	630	340	8J	230	637
	225/45ZR18	XL	Y	95	690	340	7½J	225	659
	225/45ZR18	XL	W	95	690	340	7½J	225	659
	225/50ZR18	XL	W	99	775	340	7J	233	683
	235/40ZR18	XL	Y	95	690	340	8½J	241	645

Inch	Size	Ply Rating	Speed Rating	Load Index	Load Capacity (kg)	Max Pressure	Standard Rim	Section Width	Overall Diameter
18	235/40ZR18	XL	W	95	690	340	8½J	241	645
	235/45ZR18	XL	W	98	750	340	8J	236	669
	235/50ZR18	XL	W	101	825	340	7½J	245	693
	245/40ZR18	XL	Y	97	730	340	8½J	248	653
	245/40ZR18	XL	W	97	730	340	8½J	248	653
	245/45ZR18	XL	W	100	800	340	8J	243	677
	265/35ZR18	XL	W	97	730	340	9½J	271	643
19	225/35ZR19	XL	Y	88	560	340	8J	230	641
	235/35ZR19	XL	Y	91	615	340	8½J	241	647
	235/35ZR19	XL	W	91	615	340	8½J	241	647
	235/40ZR19	XL	W	96	710	340	8½J	241	671
	245/35ZR19	XL	Y	93	650	340	8½J	248	655
	245/35ZR19	XL	W	93	650	340	8½J	248	655
	245/40ZR19	XL	W	98	750	340	8½J	248	679
	245/45ZR19	XL	W	102	850	340	8J	243	703
	255/35ZR19	XL	Y	96	710	340	9J	260	661
	255/35ZR19	XL	W	96	710	340	9J	260	661
	275/40ZR19	XL	W	105	925	340	9½J	278	703
20	NEW 225/35ZR20	XL	W	90	600	290	8J	230	666
	245/35ZR20	XL	Y	95	690	340	8½J	248	680
	245/40ZR20	XL	W	99	775	340	8½J	248	704
	NEW 245/45ZR20	XL	W	103	875	340	8J	243	728
	NEW 255/35ZR20	XL	W	97	730	290	9J	260	686
	NEW 265/45ZR20	XL	W	108	1000	290	9J	266	746
	275/30ZR20	XL	Y	97	730	340	9½J	278	674
	275/30ZR20	XL	W	97	730	340	9½J	278	674
	275/35ZR20	XL	Y	102	850	340	9½J	278	700
	275/35ZR20	XL	W	102	850	340	9½J	278	700
	275/40ZR20	XL	W	106	950	340	9½J	278	728
	275/45ZR20	XL	W	110	1060	340	9J	273	756
	275/55ZR20	XL	W	117	1285	340	8½J	284	810
21	NEW 235/45ZR21	XL	Y	101	825	290	8J	236	745
	275/45ZR21	XL	W	110	1060	340	9J	273	781
	NEW 275/50ZR21	XL	W	113	1150	340	8½J	284	809
22	NEW 285/35ZR22	XL	W	106	950	290	10J	290	759



Quiet Long-Distance Lasting Power



Quietoro BEV68

EV Touring Tyre for Quiet and Smooth Ride

Specially engineered for electric vehicles, focusing on noise reduction, extended range, and wet-surface stability. The intermittent closed-groove design combined with a low rolling resistance compound delivers a quieter, more efficient ride, ensuring comfort and confidence on every journey.

Noise Reduction & Quietness | Safe & Stable | Long-lasting Durability | Comfortable Driving

Rim Size	16"-21" inch
Tread Width	205-255mm
Aspect Ratio	40-55
Speed Rating	V-W

EV



Variable Pitch Design

Tread blocks with irregular, varying pitch widths—designed in a staggered arrangement—effectively reduce resonance noise from contact with the road, creating a quiet in-car environment.



Stable Driving Performance

By adjusting the tread pattern and optimizing the tread pressure distribution, the tyre is ensured to bear force evenly during driving, which greatly enhances grip.



Wide Central Rib

The wide central tread rib increases the contact area between the tyre and the ground, providing better grip during vehicle acceleration, braking, and cornering. This ensures the vehicle's handling performance and can minimize slippage and abnormal wear caused by rapid acceleration to the greatest extent.



Multi-directional Tread Design

The multi-angle tread design enhances the tyre's grip during acceleration and steering. The outer longitudinal tread grooves adopt a semi-wide design, and both sides of the grooves feature an intermittent non-groove design, which effectively improves the tyre's handling performance.



Fuel-efficient Compound

The new-generation solution-polymerized styrene-butadiene rubber formula, combined with the application of new materials, reduces tyre rolling resistance, decreases electrical energy consumption, and increases driving range.

Enhanced Structural Design

The seamless nylon belt layer provides excellent support for the tyre, ensuring stability during vehicle operation.

High-tensile Steel Belts

Increasing the hardness and toughness of the tyre crown makes the tyre less likely to deform, ensuring its stability and safety.

Balanced Carcass Cord Design

Reduce tyre deformation to improve vehicle stability.





Quietoro BEV68

Inch	Size	Ply Rating	Speed Rating	Load Index	Load Capacity (kg)	Max Pressure	Standard Rim	Section Width	Overall Diameter
16	175/55R16		V	80	450	300	5½J	182	598
17	205/50ZR17	XL	W	93	650	340	6½J	214	638
	205/55R17	XL	V	95	690	340	6½J	214	658
	215/50R17	XL	V	95	690	340	7J	226	648
	215/55R17	XL	V	98	750	340	7J	226	668
18	235/45ZR18	XL	W	98	750	340	8J	236	669
	255/45ZR18	XL	W	103	875	340	8½J	255	687
19	235/40ZR19	XL	W	96	710	340	8½J	241	671
	235/50R19	XL	V	103	875	340	7½J	245	719
	245/45ZR19	XL	W	102	850	340	8J	243	703
	255/40ZR19	XL	W	100	800	340	9J	260	687
	255/45ZR19	XL	W	104	900	340	8½J	255	713
20	235/50ZR20	XL	W	104	900	340	7½J	245	744
	245/50ZR20	XL	W	105	925	340	7½J	253	754
	255/45ZR20	XL	W	105	925	340	8½J	255	738
	255/50R20	XL	V	109	1030	340	8J	265	764
	255/55ZR20	XL	W	110	1060	340	8J	265	788
21	255/45ZR21	XL	W	106	950	340	8½J	255	763



Transvelo BT6

Urban SUV Tyre for Daily Versatility

Designed for both urban and highway conditions, it combines low fuel consumption, wear resistance, and quiet performance while offering light off-road capability, delivering a flexible driving experience for daily commutes and long-distance journeys.

Silent Handling · Outstanding Grip · Safety & Stability

Effortless in City Travel Beyond

Rim Size	15"-22"inch
Tread Width	205-285mm
Aspect Ratio	45-75
Speed Rating	H-W

Wetland Safety

On wet and slippery roads, the grooves ensure efficient water drainage to prevent skidding. The BT6 cross grooves combine groove and sipe structures to deliver stronger grip and enhanced handling performance.



Light Off-road Capability

The optimized spacing design between sipes and grooves effectively reduces the chance of stones or debris lodging in the tread pattern, lowering the risk of tyre damage and expanding adaptability across diverse road conditions.





Low-noise Design

The optimized pitch arrangement significantly reduces tyre noise during driving.



Symmetric Pattern Design

The symmetric tread pattern ensures even force distribution on both sides of the tyre, preventing irregular wear and extending overall service life.



Optimized Groove & Sipe Ratio

Adopts a balanced 50:50 design between grooves and sipes, this design results in relatively fine and regularly shaped tread blocks. It can increase the contact area between the tyre and the ground, enhance grip and handling on dry roads, and make the vehicle more stable during high-speed driving and cornering.

Transvelo BT6

Inch	Size	Ply Rating	Speed Rating	Load Index	Load Capacity (kg)	Max Pressure	Standard Rim	Section Width	Overall Diameter
15	205/70R15		H	96	710	300	6J	209	669
	NEW 215/75R15		T	100	800	300	6J	216	703
	215/75R15		T	100	800	300	6J	216	703
	215/75R15-WSW		T	100	800	300	6J	216	703
16	245/70R16		H	107	975	250	7J	248	750
	215/70R16		H	100	800	300	6½J	221	708
	225/70R16		H	103	875	300	6½J	228	722
	235/60R16		V	100	800	300	7J	240	688
	235/70R16		H	106	950	300	7J	240	736
	NEW 265/70R16		H	112	1120	250	8J	272	778
	NEW 275/70R16		H	114	1180	250	8J	279	792
17	215/60R17		H	96	710	300	6½J	221	690
	215/65R17		V	99	775	300	6½J	221	712
	225/60R17		V	99	775	300	6½J	228	702
	225/65R17		V	102	850	300	6½J	228	724
	NEW 235/60R17		H	102	850	250	7J	240	714
	235/65R17	XL	V	108	1000	340	7J	240	738
	245/65R17		H	107	975	300	7J	248	750
	265/65R17		H	112	1120	300	8J	272	776
	NEW 265/70R17		H	115	1215	300	8J	272	804
	285/65R17		H	116	1250	300	8½J	292	802
18	215/55R18		V	95	690	300	7J	226	693
	225/55R18		V	98	750	300	7J	233	705
	225/60R18		H	100	800	300	6½J	228	727
	235/55R18		V	100	800	300	7½J	245	715
	235/60R18	XL	V	107	975	340	7J	240	739
	235/65R18		H	106	950	300	7J	240	763
	245/60R18		V	105	925	300	7J	248	751

Transvelo BT6

Inch	Size	Ply Rating	Speed Rating	Load Index	Load Capacity (kg)	Max Pressure	Standard Rim	Section Width	Overall Diameter
19	NEW 265/60R18		H	110	1060	300	8J	272	775
	NEW 265/65R18		H	114	1180	250	8J	272	801
	NEW 265/70R18		T	116	1250	300	8J	272	829
	225/55R19		V	99	775	300	7J	233	731
	235/45R19		V	95	690	300	8J	236	695
	235/50R19		V	99	775	300	7½J	245	719
	235/55R19	XL	V	105	925	340	7½J	245	741
	245/55ZR19		W	103	875	300	7½J	253	753
	255/45R19		V	100	800	300	8½J	255	713
	255/50ZR19	XL	W	107	975	340	8J	265	739
	255/55R19	XL	V	111	1090	340	8J	265	763
20	235/55R20	XL	V	105	925	340	7½J	245	766
	265/50R20	XL	V	111	1090	340	8½J	277	774
	275/50ZR20	XL	W	113	1150	340	8½J	284	784
	275/60R20		H	115	1215	300	8J	279	838
	285/50R20		V	112	1120	300	9J	297	794
22	275/50R22		V	111	1090	300	8½J	284	835



RELIABLE AND DURABLE
READY FOR EVERY DAY'S JOURNEY



Enduaix BV28

Durable Van Tyre for Heavy-duty Mileage

Designed for commercial and highway applications, it features a robust, wear-resistant structure with strong load-bearing capacity and extended service life. Even under full loads, it maintains stability and safety — your reliable partner for efficient long-haul transportation.

Rim Size	12"-17"inch
Tread Width	155-235mm
Speed Rating	Q-H

VAN



Safe & Wear-resistant

The intricate, zigzag fine patterns evenly divide the area of large tread blocks, ensuring the tyre bears force uniformly when in contact with the ground. This promotes balanced wear and extends its service life.

Professional Load-bearing

The semi-open shoulder design, featuring large tread blocks with mutual support formed by an integrated structure of radially reinforced center ribs, ensures sufficient rigidity. This not only endows the tyre with design aesthetics but also provides professional logistics capabilities and load-bearing stability.





Inch	Size	Ply Rating	Speed Rating	Load Index	Load Capacity (kg)	Max Pressure	Standard Rim	Section Width	Overall Diameter
12	NEW 155R12C	88/86	S		560/530	450	4½J	157	550
13	155R13C		Q	85/83	515/487	350	4½J	157	578
	165R13C		R	91/89	615/580	375	4½J	167	596
14	175/65R14C		T	90/88	600/560	375	5J	177	584
	175/70R14C		R	95/93	690/650	375	5J	177	602
	175R14C		R	99/98	775/750	450	5J	178	634
	185R14C		R	102/100	850/800	450	5½J	188	650
	195R14C		R	106/104	950/900	450	5½J	198	666
	195R14C-WSW		R	106/104	950/900	450	5½J	198	666
	205R14C		R	109/107	1030/975	450	6J	208	686

Enduaix BV28

Inch	Size	Ply Rating	Speed Rating	Load Index	Load Capacity (kg)	Max Pressure	Standard Rim	Section Width	Overall Diameter
15	185R15C		R	103/102	875/850	450	5½J	188	674
	195/70R15C		R	104/102	900/850	450	6J	201	655
	195R15C		R	106/104	950/900	450	5½J	198	690
	195R15C-WSW		R	106/104	950/900	450	5½J	198	690
	205/70R15C		R	106/104	950/900	450	6J	209	669
	215/65R15C		R	104/102	900/850	375	6½J	221	661
	215/70R15C		R	109/107	1030/975	450	6½J	221	683
	225/70R15C		R	112/110	1120/1060	450	6½J	228	697
16	185/75R16C		R	104/102	900/850	475	5J	184	684
	195/60R16C		H	99/97	775/730	375	6J	201	640
	195/65R16C		T	104/102	900/850	475	6J	201	660
	195/75R16C		R	107/105	975/925	475	5½J	196	698
	205/65R16C		T	107/105	975/925	475	6J	209	672
	205/75R16C		R	113/111	1150/1090	525	5½J	203	714
	215/60R16C		T	108/106	1000/950	475	6½J	221	664
	215/65R16C		T	109/107	1030/975	475	6½J	221	686
	NEW 215/70R16C		T	108/106	1000/950	375	6½J	221	708
	215/75R16C		R	113/111	1150/1090	475	6J	216	728
	225/65R16C		T	112/110	1120/1060	475	6½J	228	698
	225/75R16C		R	121/120	1450/1400	575	6J	223	744
	235/65R16C		R	115/113	1215/1150	475	7J	240	712
17	215/60R17C		T	109/107	1030/975	475	6½J	221	690



Master Every Road
Confidence on Every Journey



Landpioneer AT B61

Combining stable on-road performance with strong off-road capability, its optimized tread pattern and casing design deliver a well-balanced blend of grip, durability, and all-round adaptability—providing reliable support across a wide range of driving conditions.

Long-lasting Durability Strong Grip All-terrain

Rim Size	14"-20" inch
Tread Width	175-315 mm
Aspect Ratio	50-80
Speed Rating	R-H

AT



All-terrain Versatility

Delivers stable performance on paved roads while meeting the demands of challenging terrain. From mud and gravel to sand and mixed surfaces, it delivers true multi-surface capability, supporting a wide range of driving scenarios.



Reinforced Structure

An optimized casing structure and sidewall compound significantly enhance resistance to tearing and cuts. Even on rough, gravel-strewn roads, the tyre maintains durability and longevity, helping reduce long-term operating costs.



Stable Traction

Aggressive shoulder blocks combined with wide, deep main grooves greatly improve traction on gravel, mud, snow, and other demanding surfaces—making vehicle recovery easier and handling more stable.



Efficient Water & Mud Evacuation

Optimized groove geometry and tread flow design help rapidly expel mud and water from the contact patch, minimizing the impact of wet conditions and maintaining reliable traction in rainy driving environments.

Landpioneer AT B61

Inch	Size	Ply Rating	Speed Rating	Load Index	Load Capacity (kg)	Max Pressure	Standard Rim	Section Width	Overall Diameter
14	175/80R14-RWL	XL	T	92	630	330	5J	177	636
	LT175/70R14-RWL	10PR	S	98/96	750/710	550	5J	177	602
	LT175/70R14-RWL	8PR	S	93/90	650/600	450	5J	177	602
15	31X10.50R15LT-RWL	6PR	S	109	1030	350	8½J	268	775
	205/60R15-RWL		H	91	615	300	6J	209	627
	205/65R15-RWL		H	94	670	300	6J	209	647
	205/70R15-RWL		T	96	710	300	6J	209	669
	215/75R15-RWL		S	100	800	300	6J	216	703
	225/70R15-RWL		T	100	800	300	6½J	228	697
	235/75R15-RWL		T	105	925	300	6½J	235	733
16	185/75R16-RWL		T	93	650	300	5J	184	684
	195/75R16C-RWL		R	110/108	1060/1000	525	5½J	196	698
	205/60R16-RWL		T	92	630	300	6J	209	652
	205/75R16C-RWL		R	113/111	1150/1090	525	5½J	203	714
	215/65R16-RWL	XL	H	102	850	340	6½J	221	686
	215/70R16-RWL		T	99	775	300	6½J	221	708
	225/70R16-RWL		T	101	825	300	6½J	228	722
	235/65R16C-RWL		R	121/119	1450/1360	575	7J	240	712
	235/70R16-RWL		S	104	900	300	7J	240	736
	245/70R16-RWL	XL	T	111	1090	340	7J	248	750
	265/70R16-RWL		T	111	1090	300	8J	272	778
	275/70R16-RWL		T	114	1180	300	8J	279	792
	LT225/75R16-RWL	10PR	R	115/112	1215/1120	550	6J	223	744
	LT245/75R16-RWL	10PR	R	120/116	1400/1250	550	7J	248	774
	LT265/75R16-RWL	10PR	S	123/120	1550/1400	550	7½J	267	804
	LT285/75R16-RWL	10PR	R	126/123	1700/1550	550	8J	286	834
17	215/60R17-RWL	XL	T	100	800	340	6½J	221	690
	225/60R17-RWL	XL	H	103	875	340	6½J	228	702
	225/65R17-RWL		T	102	850	300	6½J	228	724
	235/65R17-RWL	XL	H	108	1000	340	7J	240	738

Landpioneer AT B61

Inch	Size	Ply Rating	Speed Rating	Load Index	Load Capacity (kg)	Max Pressure	Standard Rim	Section Width	Overall Diameter
17	245/65R17-RWL	XL	T	111	1090	340	7J	248	750
	245/70R17-RWL		T	110	1060	300	7J	248	776
	255/65R17-RWL		T	110	1060	300	7½J	260	764
	265/65R17-RWL		S	112	1120	300	8J	272	776
	265/70R17-RWL		T	115	1215	300	8J	272	804
	LT285/70R17-RWL	10PR	S	126/123	1700/1550	550	8½J	292	832
	LT315/70R17-RWL	10PR	S	126/123	1700/1550	450	9½J	323	874
18	225/60R18-RWL	XL	T	104	900	340	6½J	228	727
	235/55R18-RWL	XL	T	104	900	340	7½J	245	715
	235/65R18-RWL		T	106	950	300	7J	240	763
	285/60R18-RWL		T	116	1250	300	8½J	292	799
	LT225/55R18-RWL	8PR	S	108/105	1000/925	450	7J	233	705
	LT235/60R18-RWL	8PR	S	108/104	1000/900	450	7J	240	739
	LT255/60R18-RWL	8PR	S	112/109	1120/1030	450	7½J	260	763
	LT265/60R18-RWL	8PR	S	114/110	1180/1060	450	8J	272	775
	LT265/65R18-RWL	10PR	S	122/119	1500/1360	550	8J	272	801
	LT265/70R18-RWL	10PR	S	124/121	1600/1450	550	8J	272	829
	LT275/65R18-RWL	10PR	S	123/120	1550/1400	550	8J	279	815
	LT275/70R18-RWL	10PR	S	125/122	1650/1500	550	8J	279	843
19	235/60R19-RWL	XL	T	107	975	340	7J	240	765
	255/60R19-RWL	XL	T	113	1150	340	7½J	260	789
	265/55R19-RWL	XL	H	113	1150	340	8½J	277	775
	LT255/55R19-RWL	10PR	S	115/112	1215/1120	550	8J	265	763
20	LT265/50R20-RWL	10PR	S	115/112	1215/1120	550	8½J	277	774
	LT275/65R20-RWL	10PR	S	126/123	1700/1550	550	9J	279	866
	LT285/50R20-RWL	10PR	S	119/116	1360/1250	550	8J	297	794

Climatis BAC39

ALL SEASON

All-time adaptable, easily handles diverse road conditions. From roaming through spring's flower seas to weaving through winter's city streets, all-season tyres safeguard every journey of yours with uncompromising, all-round performance.

Safe & Stable Comfortable Driving Fast Evacuation

Rim Size	13"-18" inch
Tread Width	155-245mm
Aspect Ratio	40-80
Speed Rating	T-W

1 Drainage Design

The V-shaped tread pattern offers superior water drainage, significantly reducing braking distances on wet and slippery roads. It also increases the tyre's contact area with the ground, evenly distributing acceleration, braking, and cornering forces — effectively extending service life.

2 Grip Design

The dense lateral groove design, like multiple tiny "blades," can more efficiently slice through the water film between the tyre and the road surface, allowing the tread rubber to make more direct contact with the road and reducing the "hydroplaning.

3 Water Drainage & Snow Clearance

The large groove design between the tread patterns enables rapid drainage of standing water on the road, preventing hydroplaning. On snow-covered roads, these grooves can hold snow chunks, preventing snow from accumulating and compacting on the tread — a problem that would compromise grip — thus ensuring effective contact between the tire and the ground.

4 Grip Assurance

The numerous "micro-edges" formed by the fine grooves in the tread blocks can embed into the tiny unevenness of the road surface, enhancing friction through mechanical interlocking. Meanwhile, the dense grooves on the tread can quickly drain the water film between the tread and the ground, allowing the rubber to make direct contact with the road surface and preventing "hydroplaning" on rainy days.



Season-Adaptable, Smooth All Year Round

Climatis BAC39

Inch	Size	Ply Rating	Speed Rating	Load Index	Load Capacity (kg)	Max Pressure	Standard Rim	Section Width	Overall Diameter
13	155/65R13		T	73	365	250	4.50B	157	532
	155/70R13		T	75	387	250	4.50B	157	548
	155/80R13		T	79	437	240	4.50B	157	578
	165/70R13		T	79	437	250	5.00B	170	562
	175/70R13		T	82	475	250	5.00B	177	576
14	155/65R14		T	75	387	250	4½J	157	558
	165/65R14		T	79	437	250	5J	170	570
	165/70R14		T	81	462	250	5J	170	588
	175/65R14	XL	T	86	530	290	5J	177	584
	175/70R14	XL	T	88	560	290	5J	177	602
	185/55R14		H	80	450	250	6J	194	560
	185/60R14		H	82	475	250	5½J	189	578
	185/65R14		H	86	530	250	5½J	189	596
	185/70R14		H	88	560	250	5½J	189	616
15	175/60R15		T	81	462	250	5J	177	591
	175/65R15		H	84	500	250	5J	177	609
	185/55R15		H	82	475	250	6J	194	585
	185/60R15	XL	H	88	560	290	5½J	189	603
	185/65R15		H	88	560	250	5½J	189	621
	195/50R15		V	82	475	250	6J	201	577
	195/55R15		V	85	515	250	6J	201	595
	195/60R15		H	88	560	250	6J	201	615
	195/65R15		H	91	615	250	6J	201	635
	205/65R15		H	94	670	250	6J	209	647
16	195/45R16	XL	V	84	500	290	6½J	195	582
	195/55R16	XL	V	91	615	290	6J	201	620
	205/55R16	XL	V	94	670	290	6½J	214	632

Climatis BAC39

Inch	Size	Ply Rating	Speed Rating	Load Index	Load Capacity (kg)	Max Pressure	Standard Rim	Section Width	Overall Diameter
16	205/60R16	XL	H	96	710	290	6J	209	652
	215/55R16	XL	V	97	730	290	7J	226	642
	215/60R16	XL	H	99	775	290	6½J	221	664
	215/65R16	XL	H	102	850	290	6½J	221	686
	225/55R16	XL	V	99	775	290	7J	233	654
17	205/45ZR17	XL	W	88	560	290	7J	206	616
	205/50R17	XL	V	93	650	290	6½J	214	638
	215/45ZR17	XL	W	91	615	290	7J	213	626
	215/50R17	XL	V	95	690	290	7J	226	648
	215/55R17	XL	V	98	750	290	7J	226	668
	215/60R17	XL	V	100	800	290	6½J	221	690
	225/45ZR17	XL	W	94	670	290	7½J	225	634
	225/50R17	XL	V	98	750	290	7J	233	658
	225/55R17	XL	V	101	825	290	7J	233	680
	225/60R17	XL	H	103	875	290	6½J	228	702
	225/65R17	XL	H	106	950	290	6½J	228	724
	235/45ZR17	XL	W	97	730	290	8J	236	644
	235/55R17	XL	V	103	875	290	7½J	245	690
	235/65R17	XL	V	108	1000	290	7J	240	738
18	225/40ZR18	XL	W	92	630	290	8J	230	637
	225/45ZR18	XL	W	95	690	290	7½J	225	659
	235/50R18	XL	V	101	825	290	7½J	245	693
	245/40ZR18	XL	W	97	730	290	8½J	248	653
	245/45ZR18	XL	W	100	800	290	8J	243	677



Grace in the Cold
Control in Every Move



Cryospine BW83

Urban Winter Tyre for Secure Cold-Weather Grip

With a high-adhesion compound and optimized groove design, it maintains strong traction on wet and slippery surfaces in low temperatures, effectively preventing skidding and side-slip to ensure safe driving through the cold season.

Rim Size	13"-19"inch
Tread Width	165-255mm
Aspect Ratio	40-70
Speed Rating	T-V

WINTER



Three Core Snow-drainage Grooves

Quickly channels snow, ensuring safety and stability on icy and snowy roads.



3D Deep Groove Design

Lightning-shaped 3D deep grooves enhance winter braking performance, providing more stable stopping on ice and snow.



Continuous Transverse Grooves

Rapid snow and water evacuation enhances tyre performance on snowy roads.

❶ Staggered Central Tread Blocks

Reinforced tread rigidity increases grip, keeping driving on icy and snowy surfaces stable and controllable.

❷ High-density Multi-directional Sipes

Optimized number and layout of sipes, with steel content 15% higher than conventional products, improves snow traction and boosts snow and water drainage efficiency by 10%.





Cryospine BW83

Inch	Size	Ply Rating	Speed Rating	Load Index	Load Capacity (kg)	Max Pressure	Standard Rim	Section Width	Overall Diameter
13	165/70R13		T	79	437	300	5J	170	562
14	175/70R14		T	84	500	300	5J	177	602
15	185/60R15		H	84	500	300	5½J	189	603
	185/65R15		H	88	560	300	5½J	189	621
	195/60R15		H	88	560	300	6J	201	615
	195/65R15		T	91	615	300	6J	201	635
16	195/60R16		H	89	580	300	6J	201	640
	205/55R16		H	91	615	300	6½J	214	632
	205/60R16		H	92	630	300	6J	209	652
	215/55R16	XL	H	97	730	340	7J	226	642
	215/60R16		H	95	690	300	6½J	221	664
	225/60R16	XL	H	102	850	340	6½J	228	676
17	205/55R17		V	91	615	300	6½J	214	658
	215/50R17		H	91	615	300	7J	226	648
	215/55R17		V	94	670	300	7J	226	668
	225/45R17	XL	H	94	670	340	7½J	225	634
	225/50R17		H	94	670	300	7J	233	658
	225/55R17		V	97	730	300	7J	233	680
18	225/45R18	XL	H	95	690	340	7½J	225	659
	235/45R18	XL	H	98	750	340	8J	236	669
	245/45R18		H	96	710	300	8J	243	677
19	235/40R19	XL	V	96	710	340	8½J	241	671
	235/45R19		V	95	690	300	8J	236	695
	245/45R19	XL	H	102	850	340	8J	243	703
	255/45R19		V	100	800	300	8½J	255	713



Cryospine BW86

Performance Winter Tyre for Confident Snow Control

Designed for every safety-conscious user, it ensures that the tyres cling to the road like suction cups when driving on icy and snowy surfaces, delivering exceptional grip. This effectively prevents starting skids and cornering slides, significantly enhancing driving stability.

Conquer Winter Command Ice and Snow

Rim Size	16"-22"inch
Tread Width	215-285mm
Aspect Ratio	45-65
Speed Rating	T-V

Lightning-shaped Groove Design

Lightning-style 3D deep grooves effectively enhance braking on snow and ice, boosting confidence in winter driving.



High-density Siping

Multi-directional siping with approximately 15% more steel blades significantly improves snow traction and water drainage performance.





Staggered Central Tread Blocks

Enhances tread rigidity and grip for more reliable handling on snow and ice.



Continuous Transverse Grooves

Improves snow evacuation efficiency for superior winter performance.



Three Core Snow-drainage Grooves

Quickly channels snow and water, ensuring safety and stability on icy and snowy roads.

Cryospine BW86

Inch	Size	Ply Rating	Speed Rating	Load Index	Load Capacity (kg)	Max Pressure	Standard Rim	Section Width	Overall Diameter
16	215/65R16		H	98	750	300	6½J	221	686
17	215/60R17		H	96	710	300	6½J	221	690
	225/60R17		H	99	775	300	6½J	228	702
	225/65R17		H	102	850	300	6½J	228	724
	235/65R17	XL	T	108	1000	340	7J	240	738
	265/65R17		T	112	1120	300	8J	272	776
18	215/55R18		V	95	690	300	7J	226	693
	225/50R18		H	95	690	300	7J	233	683
	225/55R18		V	98	750	300	7J	233	705
	225/60R18		H	100	800	300	6½J	228	727
	235/50R18		V	97	730	300	7½J	245	693
	235/55R18		H	100	800	300	7½J	245	715
	235/60R18		H	103	875	300	7J	240	739
	235/65R18		T	106	950	300	7J	240	763
	245/60R18		H	105	925	300	7J	248	751
	265/60R18		T	110	1060	300	8J	272	775
	265/65R18		T	114	1180	300	8J	272	801
19	225/55R19		V	99	775	300	7J	233	731
	235/50R19		V	99	775	300	7½J	245	719
	235/55R19		H	101	825	300	7½J	245	741
	235/60R19	XL	T	107	975	340	7J	240	765
	245/55R19		H	103	875	300	7½J	253	753
	255/55R19	XL	H	111	1090	340	8J	265	763
	255/60R19		T	109	1030	300	7½J	260	789
	265/55R19	XL	T	113	1150	340	8½J	277	775

Cryospine BW86

Inch	Size	Ply Rating	Speed Rating	Load Index	Load Capacity (kg)	Max Pressure	Standard Rim	Section Width	Overall Diameter
20	235/50R20	XL	H	104	900	340	7½J	245	744
	235/55R20		H	102	850	300	7½J	245	766
	245/45R20	XL	V	103	875	340	8J	243	728
	245/50R20		H	102	850	300	7½J	253	754
	255/45R20	XL	V	105	925	340	8½J	255	738
	255/50R20	XL	V	109	1030	340	8J	265	764
	255/55R20	XL	H	110	1060	340	8J	265	788
	275/45R20	XL	H	110	1060	340	9J	273	756
21	265/45R21	XL	V	108	1000	340	9J	266	771
22	285/45R22	XL	V	114	1180	340	9½J	285	815



Cryospine BW89

Studdable Winter Tyre for Extreme Ice Grip

Precision-arranged anti-slip studs and optimized groove design work together to firmly grip icy and snowy surfaces, enhancing traction and braking stability, allowing a confident and safe winter drive.

Rim Size	13"-20" inch
Tread Width	155-275mm
Speed Rating	Q-H

1 Silent Stud Layout

Optimized stud layout significantly reduces impact and noise on snow and ice, delivering a quieter, smoother ride.

2 "Z"pattern Balanced Tread

Combining Z-shaped and block tread patterns enhances snow and ice grip while maintaining wear resistance, low rolling resistance, and quiet performance.

3 Secure Stud Holes

Reinforced inner walls and precise moulding ensure studs remain firmly seated, boosting snow bite while minimizing loosening or loss.

4 Open Shoulder Design

Effectively evacuates snow and slush from the sides, keeping the tread clear and improving performance on snowy surfaces.

5 3D Multi-directional Sipes

Multi-angle sipes continuously bite into snow and ice, enhancing grip, reducing tread deformation, and improving driving stability.

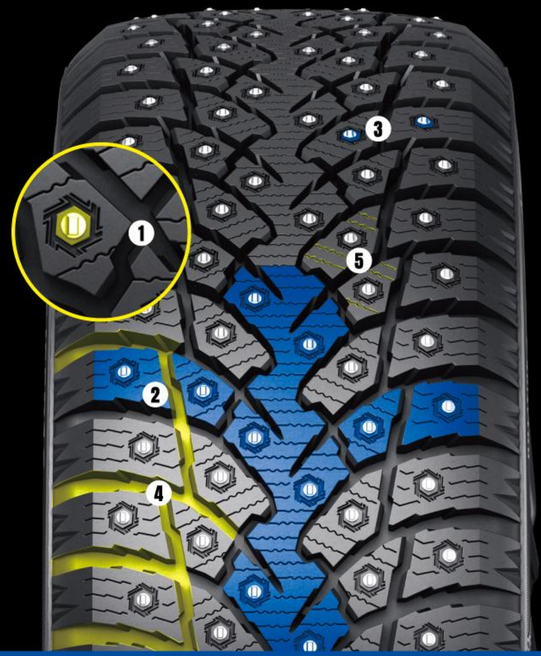

Snow Secure, Move Calmly

Cryospine BW89

Inch	Size	Ply Rating	Speed Rating	Load Index	Load Capacity (kg)	Max Pressure	Standard Rim	Section Width	Overall Diameter
13	155/70R13		T	75	387	300	4½J	157	548
	175/70R13		T	82	475	300	5J	177	576
14	175/65R14		T	82	475	300	5J	177	584
	185/60R14		T	82	475	300	5½J	189	578
	185/65R14	XL	T	90	600	340	5½J	189	596
	185/70R14	XL	T	92	630	340	5½J	189	616
15	185/55R15	XL	T	86	530	340	6J	194	585
	185/60R15	XL	T	88	560	340	5J	189	603
	185/65R15		T	88	560	300	5½J	189	621
	195/55R15		H	85	515	300	6J	201	595
	195/65R15		T	91	615	300	6J	201	635
	205/70R15		T	96	710	300	6J	209	669
16	185/75R16C		R	104/102	900/850	475	5J	184	684
	195/55R16	XL	T	91	615	340	6J	201	620
	195/75R16C		R	107/105	975/925	475	5½J	196	698
	205/55R16		T	91	615	300	6½J	214	632
	205/55R16	XL	T	94	670	340	6½J	214	632
	205/60R16		T	92	630	300	6J	209	652
	205/65R16		T	95	690	300	6J	209	672
	215/60R16		T	95	690	300	6½J	221	664
	215/65R16		T	98	750	300	6½J	221	686
	215/70R16		T	100	800	300	6½J	221	708
	225/75R16C		R	116/114	1250/1180	475	6J	223	744
	245/70R16	XL	T	111	1090	340	7J	248	750
	LT265/75R16	10PR	Q	123/120	1550/1400	550	7½J	267	804
	LT285/75R16	10PR	Q	126/123	1700/1550	550	8J	286	834
17	215/50R17	XL	T	95	690	340	7J	226	648
	215/55R17	XL	T	98	750	340	7J	226	668
	215/60R17	XL	T	100	800	340	6½J	221	690
	225/45R17	XL	H	94	670	340	7½J	225	634
	225/50R17	XL	H	98	750	340	7J	233	658
	225/55R17	XL	H	101	825	340	7J	233	680

Cryospine BW89

Inch	Size	Ply Rating	Speed Rating	Load Index	Load Capacity (kg)	Max Pressure	Standard Rim	Section Width	Overall Diameter
17	225/60R17		T	99	775	300	6½J	228	702
	225/65R17		T	102	850	300	6½J	228	724
	235/65R17		T	108	900	300	7J	240	738
	265/65R17		T	112	1120	300	8J	272	776
18	215/55R18		T	95	690	300	7J	226	693
	225/40R18	XL	T	92	630	340	8J	230	637
	225/45R18	XL	T	95	690	340	7½J	225	659
	225/55R18	XL	T	102	850	340	7J	233	705
	225/60R18	XL	T	104	900	340	6½J	228	727
	235/45R18	XL	T	98	750	340	8J	236	669
	235/55R18	XL	T	104	900	340	7½J	245	715
	235/60R18		T	103	875	300	7J	240	739
	245/45R18	XL	T	100	800	340	8J	243	677
	265/60R18	XL	T	114	1180	340	8J	272	775
19	225/55R19	XL	T	103	875	340	7J	233	731
	235/55R19	XL	T	105	925	340	7½J	245	741
20	275/55R20	XL	T	117	1285	340	8½J	284	810
	LT275/60R20	8PR	Q	119/116	1360/1250	450	8J	279	838


Confidence On
Every Journey
BOTRIAN